

SECUMAX OPTICUT
STABLE POSITIONING. SLIDES AS SMOOTH AS SILK.

SAURYA

Value Driven Safety



ENJOY SAFETY
MADE IN SOLINGEN

martor

SECUMAX OPTICUT

NO. 437



4-times usable blade

Before you need to change your blade, you have the option of rotating it multiple times. Four times to be precise. In this way, you can get so much more out of your blade. Practical for you, favourable for your company!



Work ergonomically

It's easy to work ergonomically with the SECUMAX OPTICUT. Your fingers will be delighted with the sizable grip, your thumb with the additional curving at the front of the handle. Glide cutting couldn't be more comfortable.




Cut clean

Whether cutting foam or film, the bendable plastic material-guide reliably stops material jamming in front of the blade. The same guide simultaneously protects your fingers from blade contact.



Extremely robust

The glide foot, made of Teflon-coated metal, is both durable and robust. The foot and the similarly robust handle are firmly screwed together; you will be sure to enjoy your cutting tool for an extended period of time.



Easy blade change









Blade change is performed using the small, rotating bracket found on the cutter side. Swing, press and release the guide foot. The blade is housed within the foot. Replace or rotate the blade before pushing everything back into place.

Glides over the material. And right through the middle. For „push“ cutting.





You are looking for a film and foam cutter that effortlessly cuts harder and stronger film? One that's not afraid of stubborn foam? You have found the best possible solution with the SECUMAX OPTICUT. Its Teflon-coated, metal foot makes it both extremely abrasion resistant and easy to slide. Glide with jam less ease through whatever material you want to cut. Ideal for „push“ cutting.

PRODUCT FEATURES

Technical features

	Maximum safety		Tool-less blade change
	Very abrasion resistant		Very ergonomic
	4-times usable blade		Cutting depth
	For right and left hander		Printable for promotional purposes

Main cutting materials

	Cardboard: 1-ply		Wrapping, stretch, and shrink foil
	Plastic strapping band		Layers of foil or paper
	Coated film		Laminated film

Installed blade




NO. 37040 0.40 mm, deep-edged

Optional blade



NO. 13730 0.30 mm, stainless
NO. 83730 0.30 mm, stainless, TiN coated

Application

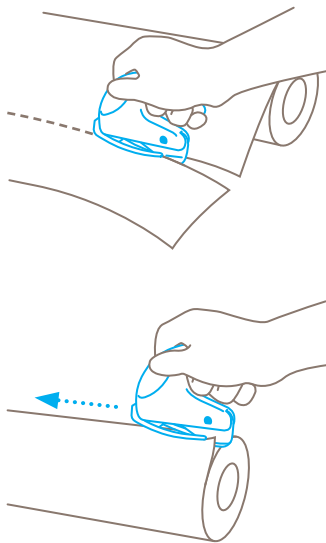

Safety technology

Concealed blade – a maximum degree of safety

The SECUMAX OPTICUT blade is not an open one, but is hidden from people and goods. This provides you with the highest degree of safety from cut injuries and from damage to goods.

Certificates and awards






THE PERFECT FIT FOR ALL. DOES THE PERFECT JOB.

SECUMAX OPTICUT

- › Specialist for film and foam
- › For „push“ cutting.
- › Concealed blade
- › Robust glide foot made of metal
- › TÜV-certified

PRODUCT DETAILS

Order No.	NO. 437.00
Packaging unit	1 on self-service card (5 in multipack)
Knife size (L x W x H)	112 x 19 x 84.5 mm
Main material	Plastic
Weight	74.0 g
Cutting depth	7.3 mm
Spare blade Packaging unit Size (L x W x Thickness)	NO. 37040.60 (10 in transparent pack) 43 x 22.2 x 0.40 mm
Certified	GS certificate NO. S 60077225
Accessories	
USED BLADE CONTAINER	 NO. 9810
WALL MOUNT BRACKET USED BLADE CONTAINER	 NO. 9845
SAFEBOX	 NO. 108000



Value Driven Safety

CONTACT AND SERVICE

What makes our cutting solutions even safer?
Our advisory services! We are always on hand,
to give advice, to provide you with training ma-
terial, to meet with you in person if necessary.

You will find further information on our website:
www.sauryahse.com



From the first cut to changing the blade, our vid-
eo will show you the best way to use this knife.



Everything you want to know: dimensions, prop-
erties, special features and more about our cutting
tools can be found in the Technical Data Sheet.



Still have questions? You can reach our service
department on [+91 22 4065 5555](tel:+912240655555)