

**SEE BETTER.
WORK BETTER.**

SAURYA

Value Driven Safety

**A
T
E
X
O
R**



SLAM[®] | MICA[®] | SLAM FIXED[®]

PORTABLE LIGHTING ■ ■ ■



HANDLAMPS ■ ■



ATEXOR OY. YOUR -LIGHTING PARTNER.

**DECADES OF EX EXPERIENCE ARE IN EVERY ATEXOR PRODUCT,
TESTED TOUGH TO WITHSTAND THE HARSHTEST CONDITIONS**

The right lighting makes all the difference. Get it wrong, and jobs can easily be slowed or worse, get dangerous, especially in Explosion Hazardous Areas and confined spaces.

For over 35 years, we at Atexor have worked hard to ensure customers get the best lighting solution possible. Be it a refinery, oil tank, drill ship, FPSO, petrochemical complex – you name it, we can create the ideal lighting solution.

Our portfolio is second to none, from fixed luminaires to portable work lights, floodlights and power distribution systems, or just a good-old rugged flashlight.

All our products are designed and manufactured in Finland. Reliability, high quality and our commitment to solving challenges on demanding time schedules are why customers around the world choose Atexor.

Atexor Oy is part of Finnish Teknower Group, a family-owned corporation encompassing Atexor, Teknoware and FLS Finland, with locations in Finland, Sweden, Russia, Germany, UK, Poland, UAE, India, Malaysia and USA.

ATEXOR Oy prepared this information herein in good faith but makes no representation as to its comprehensiveness or accuracy. ATEXOR Oy reserves the right to make changes to specifications and product descriptions at any time without notice. 9-2021.



INDEX

PRESENTATION 2
GOING BEYOND EX-CERTIFICATION 4

PORTABLE LIGHTING ■ ■ ■

EX LIGHTING KITS FOR TANKS & VESSELS . . . 6
 SLAM® Linear Tank Set 6
 SLAM® Link-up Tank Set 6
 SLAM® EM Tank Set 6
 SLAM® Star Tank Set 7
 SLAM® Tank Set with SEMIC Inspection Lights 7
 SLAM® Inspection Set 7
SLAM® STAR. 8
SLAM® HORNET LEDS 10
 SLAM® Hornet 1LED, 2LED, Linear 2LED,
 Hornet 1LED 12V, 1LED 12V 11
SLAM® HORNET EM & EXIT 12
SLAM® SEMIC SP 14
SLAM® EX-TRANSFORMERS. 16
 SLAM® TrafoEx ATEX, SLAM® TrafoEx IECEX 17
SLAM® EX-SPLITTERS. 18
 SLAM® Splitter Ex 19
 SLAM® Splitter Ex High Temp 19
EXTENSION CABLES AND CABLE REELS
WITH EX-CERTIFICATION. 20
 SLAM® Extension Cable, SLAM® Cable Reel 21

ACCESSORIES. 22
SLAM® CLICK'N FIX SERIES 23
 SLAM® Magnetic Bracket 23
 SLAM® Magnetic Bracket Loose. 23
 SLAM® Single Bracket 24
 SLAM® Scaffold Bracket 24
 SLAM® Unistrut Bracket 24
 SLAM® Protector 24
 SLAM® S-Hook Kit 25
 SLAM® S-Hook 25
 SLAM® Hanging Straps 25
 SLAM® Protective film. 24-25

HANDLAMPS ■ ■

MICA PRODUCTS 26
 MICA® IL-800 27
 MICA® ML-808 29
 Intelligent chargers for MICA® lamps. 29

FIXED LIGHTING ■

SLAM FIXED PRODUCTS 30
 SLAM® Fixed Nordic 1LED, 2LED WS 31
 SLAM® Fixed Novo 1LED, 2LED 31
 SLAM® SEMIC SF 33
 SLAM FIXED® 1&2LED Ceiling & Wall Installation Kit . 35
 SLAM FIXED® 1&2 LED Pole Installation Kit 35
CONTACT INFORMATION 36

GOING BEYOND EX-CERTIFICATION

ATEX/UKEX/IECEx -certification is just the beginning at Atexor. With an ISO 9001 quality system and ATEX certified production, every feature, function and solution is the result of world-class design and engineering proven through end-to-end testing. Atexor products are more than just basic Ex-lights.

SafeEye®

The raw light from powerful LEDs is blinding and painful. Our SafeEye® diffuser ensures SLAM® work lights are safe and easy on workers' eyes by spreading the light beam without significantly reducing lumens.

PHOTOBIOLOGICAL SAFETY

High intensity light sources can be harmful to both skin and eyes through ultraviolet, Blue Hazard Light and infrared emissions. Most white LEDs use blue emitting LED die so some portion of the total output as blue light. With Atexor, you can trust that our LEDs are tested for Photobiological Safety according to EU Directive 2006/25/EC – artificial optical radiation.

EM-Function By Atexor

Working in EX areas is challenging. A power failure turns that challenge into danger. We designed our EM-Function battery backup solution specifically to address this risk. Work lights with a backup battery provide peace of mind, and lighting for safe exit in an emergency. Both SLAM® and MICA® series products include EM-Function options.

OPTICAL RADIATION

High-powered LEDs are comparable to a laser. Extremely intense and concentrated, they could easily ignite small airborne particles, for instance. This is why we have the optical radiation inherently safe, or 'op is,' industrial standard IEC/EN 60079-28.

All SLAM® LED work lights are op is rated, yet still provide maximum, safe lumens. Often overlooked in testing and certifications, Atexor covers op is in our certifications and typically mark our products with "op is" for easy verification of optical radiation safety.

SLAM® SEMIC SP


SLAM® Star 110/230V




110V/230V SLAM® Cable Reel

SLAM® SEMIC SP

SLAM® Transformer
Input: 110/230V,
Output: 12/24/42V

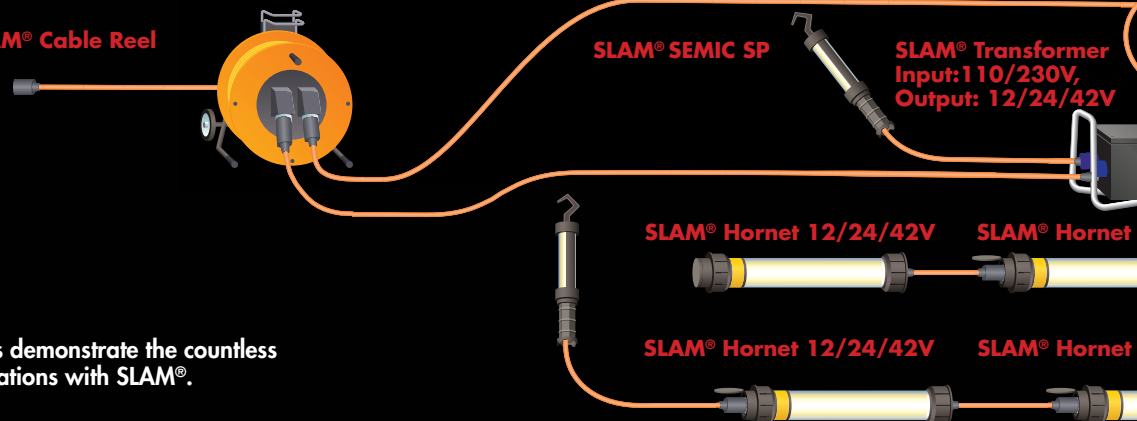

These illustrations demonstrate the countless possible configurations with SLAM®.

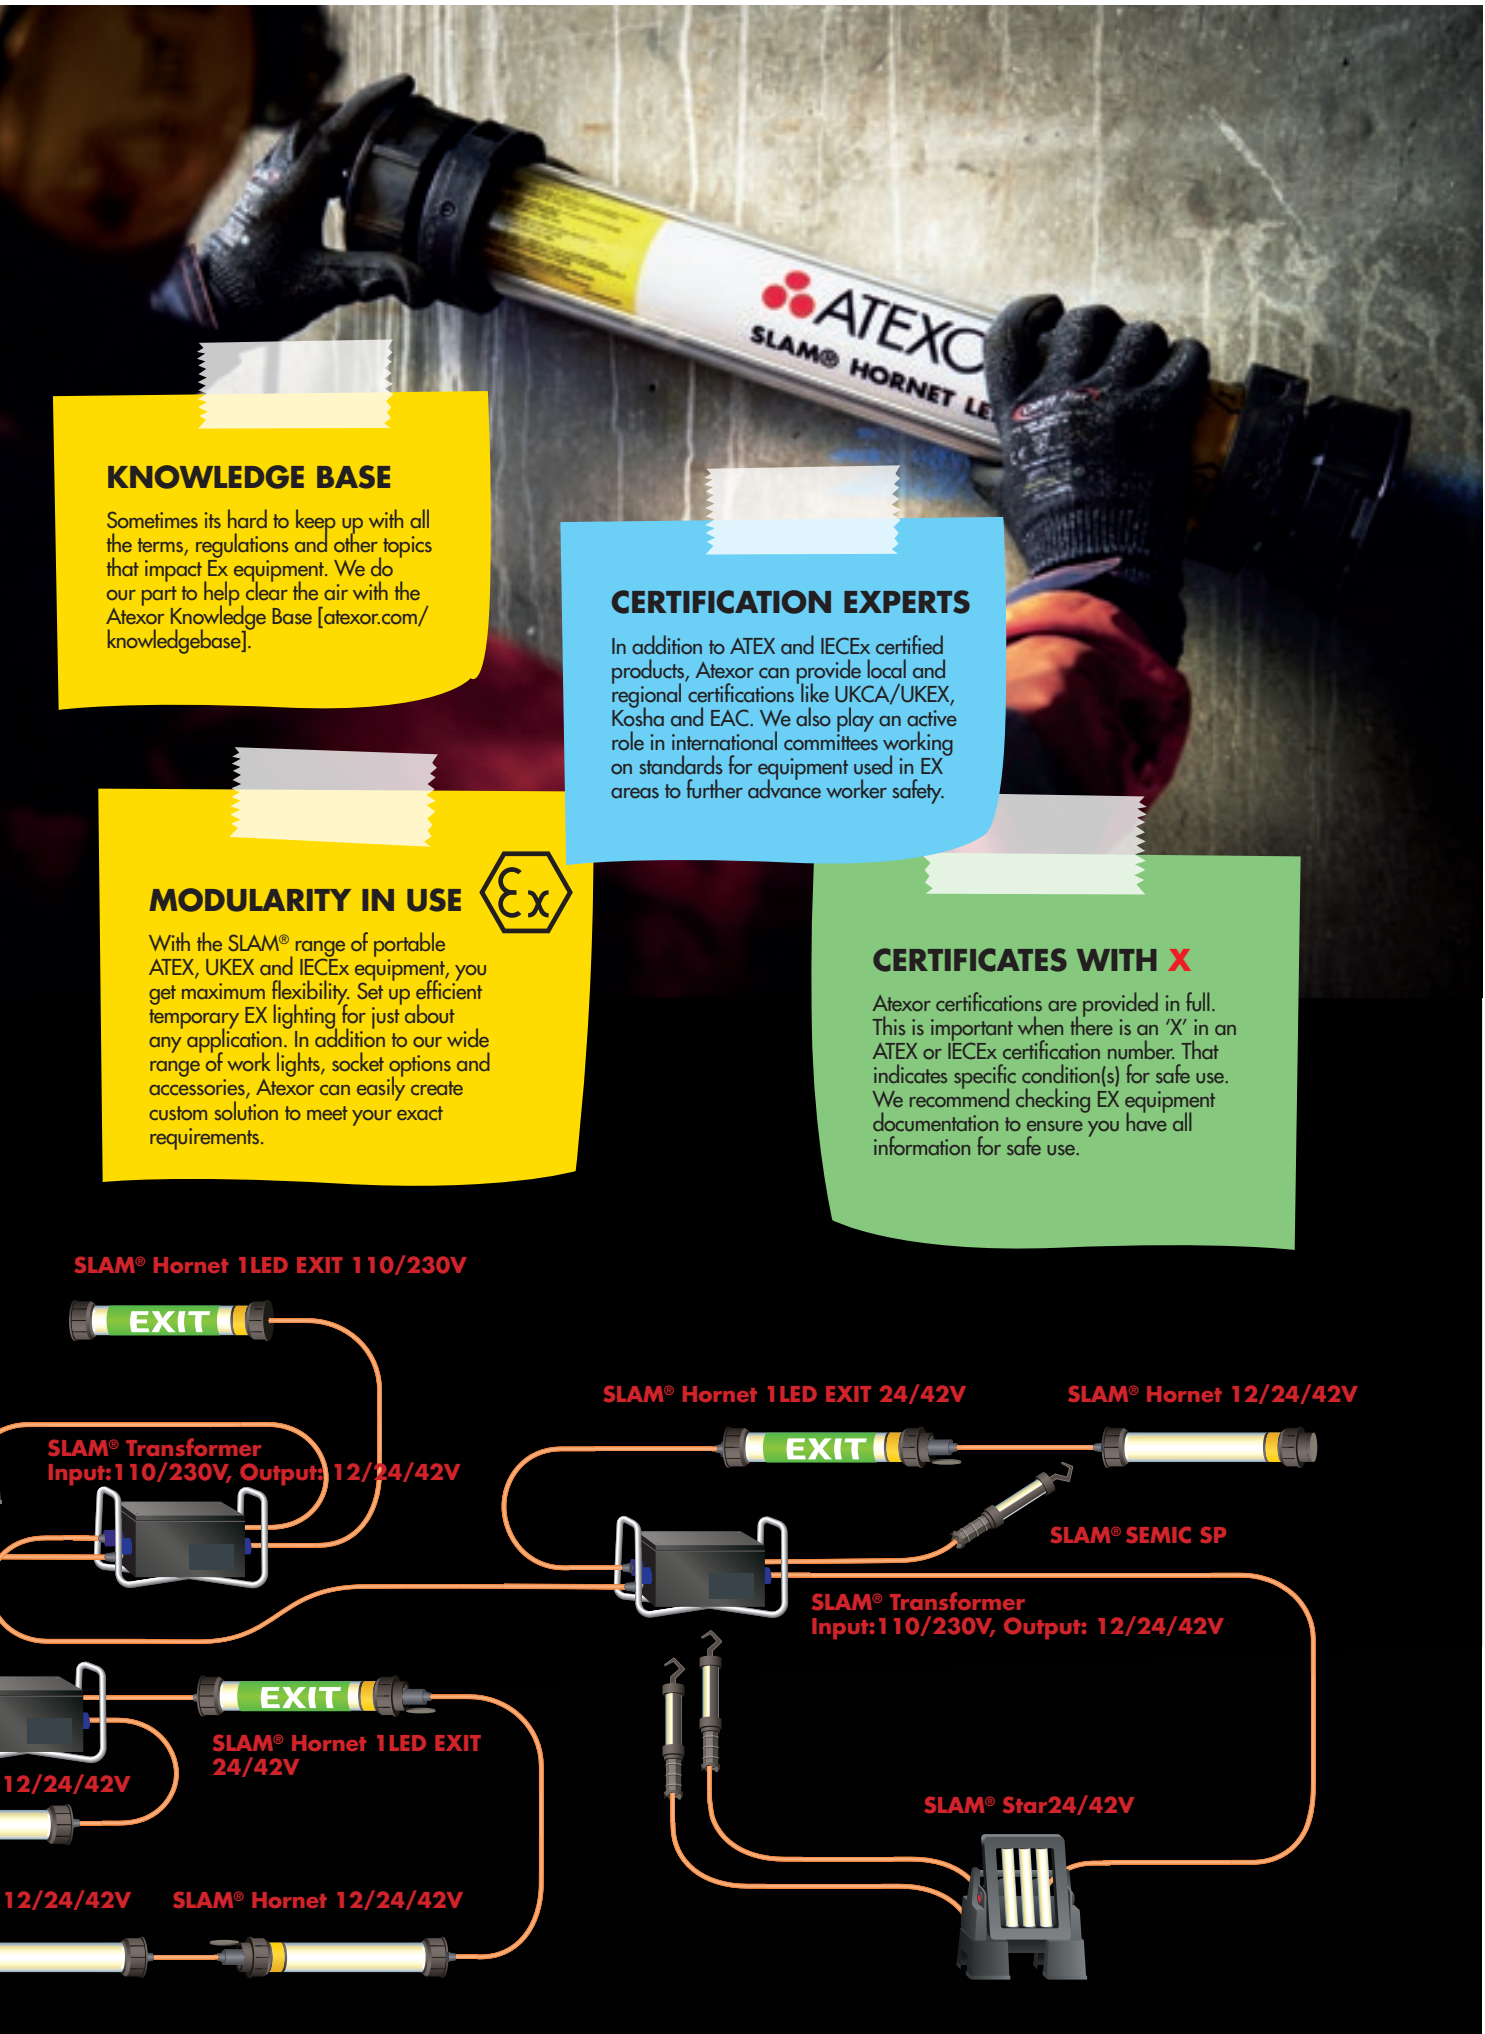

KNOWLEDGE BASE

Sometimes its hard to keep up with all the terms, regulations and other topics that impact Ex equipment. We do our part to help clear the air with the Atexor Knowledge Base [atexor.com/knowledgebase].

CERTIFICATION EXPERTS

In addition to ATEX and IECEx certified products, Atexor can provide local and regional certifications like UKCA/UKEX, Kosha and EAC. We also play an active role in international committees working on standards for equipment used in EX areas to further advance worker safety.

MODULARITY IN USE



With the SLAM® range of portable ATEX, UKEX and IECEx equipment, you get maximum flexibility. Set up efficient temporary EX lighting for just about any application. In addition to our wide range of work lights, socket options and accessories, Atexor can easily create custom solution to meet your exact requirements.

CERTIFICATES WITH X

Atexor certifications are provided in full. This is important when there is an 'X' in an ATEX or IECEx certification number. That indicates specific condition(s) for safe use. We recommend checking EX equipment documentation to ensure you have all information for safe use.

SLAM® Hornet 1LED EXIT 110/230V

SLAM® Hornet 1LED EXIT 24/42V

SLAM® Hornet 12/24/42V

SLAM® Transformer
Input:110/230V, Output: 12/24/42V

SLAM® SEMIC SP

SLAM® Transformer
Input:110/230V, Output: 12/24/42V

SLAM® Hornet 1LED EXIT
24/42V

SLAM® Star24/42V

12/24/42V

SLAM® Hornet 12/24/42V

12/24/42V

EX LIGHTING KITS FOR TANKS & VESSELS

SAFETY WITH LOW-VOLTAGE.

Take advantage of pre-configured, specially designed SLAM® sets. Each is a complete, ATEX-certified portable lighting solution right out of the box. If you need adjustments, no problem! We can easily customize any set to meet your exact requirements. Add optional Ex-certified extension cables and reels to increase flexibility.

SLAM® Linear Tank Set

- 24 VAC STEP-DOWN TRANSFORMER
- 3X LINEAR 2LED WORK LIGHTS
- EXIT LIGHT W/BATTERY • 8X BRACKETS & STRAPS



SLAM® Link-Up Tank Set

- 42 VAC STEP-DOWN TRANSFORMER
- 4X 2LED WORK LIGHTS • EXIT LIGHT W/BATTERY • 10X BRACKETS & STRAPS
- ALSO 24V AVAILABLE



SLAM® EM Tank Set


- 24 VAC STEP-DOWN TRANSFORMER
- 3X LED WORK LIGHTS (EM) • EXIT LIGHT W/BATTERY • 8X BRACKETS & STRAPS



SLAM LINEAR TANK SET

SLAM LINK-UP TANK SET

SLAM EM TANK SET

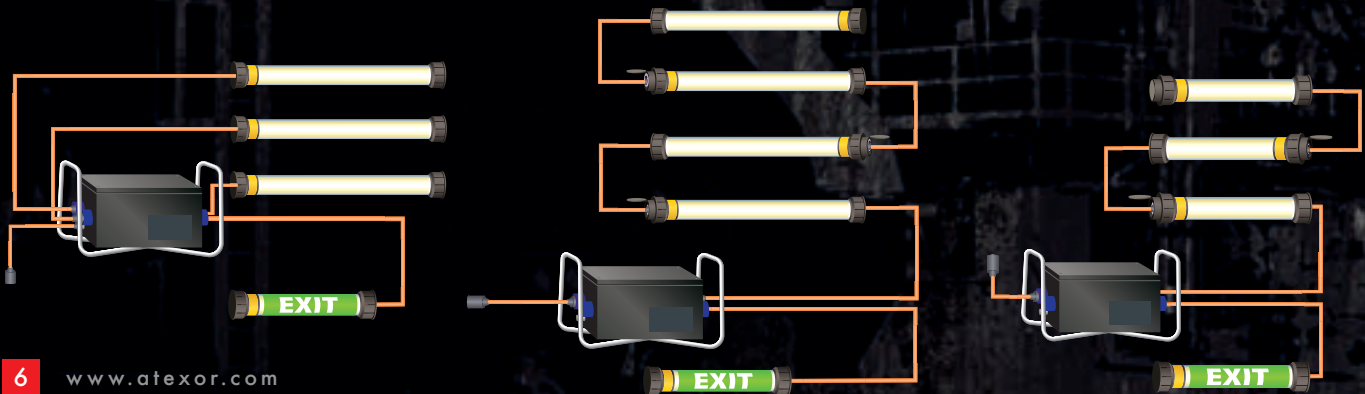

SLAM® Star Tank Set

- 24 VAC STEP-DOWN TRANSFORMER
- 3X LED FLOOD LIGHTS • EXIT LIGHT W/BATTERY
- 2X BRACKETS & STRAPS




SLAM® TANK SET with SEMIC Inspection Lights

- 24 VAC STEP-DOWN TRANSFORMER
- 3 X LINEAR 2LED WORK LIGHTS • EXIT LIGHT W/BATTERY
- 3 X SEMIC SP WORK LIGHTS
- 8 X BRACKETS & STRAPS



SLAM® INSPECTION Set

- 24 VAC STEP-DOWN TRANSFORMER
- 4 X SEMIC SP WORK LIGHTS

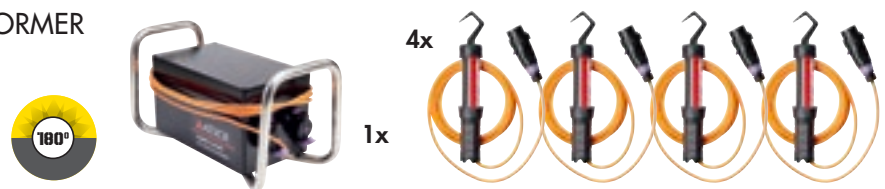




EX-CERTIFIED CABLE REELS AND EXTENSION CABLES AVAILABLE SEPARATELY (see pg. 20-21)



SLAM STAR TANK SET

SLAM® TANK SET with SEMIC Inspection Lights

SEMIC INSPECTION SET

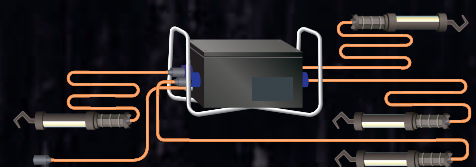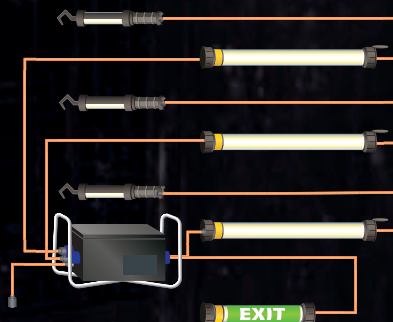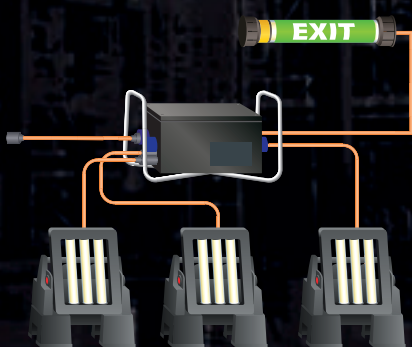

SLAM

STAR PORTABLE EX-FLOODLIGHT




**SAFE LIGHT!
OP IS IN
CONTROL**



110/230V



TrafoEx

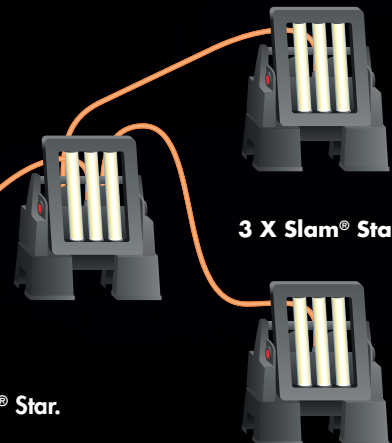

3 X Slam® Star

With two built-in sockets, significantly simplify cabling with SLAM® Star.

SLAM® Star

- ATEX & IECEX CERTIFICATION FOR ZONES 1 & 2
- INGRESS PROTECTION IP66 AND TEMP CLASS T4
- LONG-LIFE, POWERFUL LEDs (50 000 HOURS)
- CERTIFIED AS PORTABLE EX-EQUIPMENT SAFE TO MOVE, EVEN WHILE POWERED • FULLY ANTISTATIC
- AVAILABLE WITH STRONG MAGNETS • SERVICE FRIENDLY CONSTRUCTION



We engineered the Atexor SLAM® STAR Portable Floodlight to ensure its surface temperatures remains very low during operation. The ultra-bright LEDs emit 5,400 tested lumens of clean, white light (4000K), while generating hardly any heat.

With a 25° step-less adjustment, you can aim the light just as you need. You can also move the floodlight around at any time. There's no need to disconnect the power supply!

We have carefully selected the materials for this ATEX certified floodlight to eliminate the risk of sparks. Everything is dissipative, so there is no buildup of static charge. The double-shell construction means you can work worry-free. This floodlight is ready for tough use and abuse.

Each long-life, powerful LED set (50,000 hours) is controlled by an independent, isolated electronics unit. If one fails, the others stay lit. Our electronics layout also further improves on the already low maintenance: each unit can be individually replaced.

With an option for 0-2 Ex-socket sockets, the Star can be used as a splitter to link additional lights. The sockets also feature our new patented design for quick and easy cable or socket repairs.

Use our sturdy magnets to mount the STAR floodlight to steel walls and structures and easily keep the floodlight free of dirt and grime with our replaceable protective films.

EXTRA SAFETY FEATURE.
EACH LED UNIT IS CONTROLLED BY
INDEPENDENT ELECTRONICS.
IF ONE FAILS, OTHER TWO STAY LIT!



| TECHNICAL DATA | Star (3LED) |
|--------------------------|---|
| Code | SS3LED |
| Certification | II2 G Ex eb mb op is IIC T4 Gb |
| Ingress protection | IP66 |
| Operating temperature | -20°C ... +40°C |
| Supply voltage | 100 - 250 VAC/DC, 0/50/60Hz or 20 - 50 VAC/DC, 0/50/60Hz |
| Luminous flux (measured) | 5412 lm |
| Light emitted at source | Approx. 7400 lm |
| Dimensions | 412 x 356 x 492 mm |
| Weight | 10,5 kg |
| Variables | A = Cable in. C = Cable in, one or two sockets out. |

SLAM

HORNET LEDS



✓ SafeEye® ✓ OP IS
APPROVED



VARIABLES

SLAM® LIGHTS COME WITH TWO OPTIONS FOR SUPPLYING POWER

A Single male connection on end of power cable to power supply.



C Has an EX-approved socket on the other end of the light. This allows linking in EX-hazardous area.



SLAM® Hornet 1LED, SLAM® Hornet 2LED, SLAM® Hornet Linear 2LED, 1LED 12V

- EX-CERTIFIED FOR ZONES 1 AND 21
- TEMPERATURE CLASS T4 • LINKABLE IN SERIES
- ATEXOR SAFEYE® LED TECHNOLOGY • SELECT FROM A WIDE RANGE OF SPECIALLY DESIGNED FIXINGS • EXTREMELY DURABLE CONSTRUCTION
- EASILY REPLACEABLE ANTI-STATIC FILM
- OPTICAL IRRADIANCE MINIMIZED



The well-known and widely praised SLAM Hornet family has been fully upgraded to use the latest in high-quality LED technology. This adds even further benefits to our already durable, long-lasting Hornets: energy efficiency, longer lifetime and reduced service costs. Thanks to SafeEye®, Atexor LED work lights produce a smooth, non-irritating light.

Using Hornet LEDs in hazardous areas also benefits from an improved T-class, allowing entry various areas with T4 requirements, such as those found in petrochemical refineries.

SLAM Hornet LEDs support a wide range of voltages, including extra-low voltage with the SLAM Hornet 12VLED that can use a power supply as low as 9V.



| TECHNICAL DATA | HORNET 1LED | HORNET 2LED | HORNET LINEAR 2LED | HORNET 1LED 12V |
|-----------------------|--|--|--|---|
| Code | SH1LED | SH2LED | SHL2LED | SH1LEDA12 |
| Certification | II 2 G Ex emb op is IIC T4 Gb II 2 D Ex tb op is IIIC T90°C Db IP66 | II 2 G Ex emb op is IIC T4 Gb II 2 D Ex tb op is IIIC T90°C Db IP66 | II 2 G Ex emb op is IIC T4 Gb II 2 D Ex tb op is IIIC T90°C Db IP66 | Ex II 2 G Ex eb mb op is IIC T4 Gb Ex II 2 D Ex tb op is IIIC T90°C Db |
| Ingress protection | IP66 | IP66 | IP66 | IP66 |
| Operating temperature | -20 to +40 °C | -20 to +40 °C | -20 to +40 °C | -20 °C to +40 °C |
| Supply voltage | 24VAC/DC, 42VAC/DC, 110VAC/DC, 230VAC | 24VAC/DC, 42VAC/DC, 110VAC/DC, 230VAC | 24VAC/DC, 42VAC/DC, 110VAC/DC, 230VAC | 9-15VAC/DC |
| Frequency | 0 Hz (DC), 50 Hz, 60 Hz | 0 Hz (DC), 50 Hz, 60 Hz | 0 Hz (DC), 50 Hz, 60 Hz | 0 Hz (DC), 50 Hz, 60 Hz |
| Dimensions | 535 x 115 mm (A-cable in) 575 x 115 mm (C-cable in, socket out) | 865 x 115 mm | 1020 x 115 mm | 580 x 115 mm |
| Weight | 1.8 kg | 3.1 kg | 3.4 kg | 1.7kg |
| Variables | A-cable in, C-cable in, socket out | A-cable in, C-cable in, socket out | A-cable in, C-cable in, socket out | A-cable in |

**SLAM**

HORNET EM & EXIT 1LED

✓ SafeEye® ✓ OP IS

APPROVED

IMPROVE SAFETY WITH EM FUNCTION

Atexor work lights that feature our EM Function use a backup battery to power a dual-purpose emergency feature. Advanced electronics enable the EM Function to generate strong light when the primary power supply is lost. As an additional safety feature, the EM Function initiates flashing at 15-second intervals to alert workers of the power outage. The heavy-duty battery keeps the work light powered for a solid three hours.

SLAM® Hornet EM & Exit 1LED

- ATEX & IECEX CERTIFIED FOR ZONES 1 AND 21
- STRONG LUMENS WITH SAFE EYE® PROTECTION
- T4 TEMPERATURE CLASS
- PORTABLE, MOVE WHILE CONNECTED
- 3-HOUR BATTERY BACKUP
- EXTREMELY ROBUST CONSTRUCTION
- RECHARGEABLE BACKUP BATTERY UNIT
- LIGHT TUBE COVERED WITH EASILY REPLACEABLE ANTI-STATIC FILM
- OPTICAL IRRADIANCE CONSIDERED
- BUILT-IN EX-SOCKETS ENABLE LINKING IN EX-AREA



SLAM® Hornet EM 1LED offer you all the unbeatable Atexor features in one package, including dual purpose EM Function, powerful LED light with SafeEye® and the most rugged construction on the market.

If the main power supply is lost while workers are on the job, the EM function helps them leave the site safely. A flashing light indicates power is out, and our battery ensures workers have up to 3 hours to exit in a safe manner.



| TECHNICAL DATA | HORNET EM 1LED & HORNET EXIT 1LED |
|---|--|
| Code | SHEM1LED & SHEXIT1LED |
| Certification | Ex II 2 G Ex eb ib mb op is IIC T4 Gb Ex II 2 D Ex tb op is IIIC T90°C Db |
| Ingress protection | IP66 |
| Operating temperature | -20°C ... +40°C |
| Supply voltage | 24VAC/VDC – 42VAC/VDC – 110VAC/VDC – 230VAC/VDC |
| Power consumption | <30W |
| Battery operational during electricity cuts | Up to 3 hours |
| Dimensions | 708 mm x 115 mm Ø |
| Weight | 2,9 kg |
| Variables | A-cable in, C-cable in, socket out |

SLAM 

SEMIC SP



SEMIC SP IS A PERFECT ADD-ON TO SLAM® TANK SETS.



SLAM® SEMIC SP

- ATEX, IECEX AND UKEX CERTIFIED FOR ZONES 1 & 21
- DISSIPATIVE, ANTI-STATIC CONSTRUCTION
- UP TO T5 RATING
- IP68
- HIGH QUALITY LED WITH CRI85
- TESTED FOR OPTICAL RADIATION (OP IS)
- CLAW HOOK WITH SWIVEL
- REPLACEABLE PROTECTIVE FILM
- PERFECT ADD-ON TO SLAM® TANK SETS




The SEMIC SP is extremely compact and durable portable, hand-held light with an exceptionally long lifespan. Everything is exceptional, from its T5 and IP68 safety ratings to the simple, yet ingenious ergonomic design and swivel.

Atexor supplies SEMIC SP with all major Ex plug types. You can also use the SP as an add-on for SLAM low-voltage lighting sets.

High-quality LEDs with CRI 85 help color detection in tight spaces. The SP safety credentials include op-is approval, ensuring the light cannot be a source of ignition, and a fully encapsulated construction.

The SP comes with a claw-shaped swivel hook and easy-grip handle made from dissipative material, so you can safely and easily hold the light in your hand or hang it from any structure. The small size and soft ends of the SP make it perfect for inspecting very tight spaces and delicate equipment such as fuel tanks.

A solid, compact and extremely durable hand-held work light with swivel hook. Replaceable protective film makes it easy to keep the lights clean and bright.

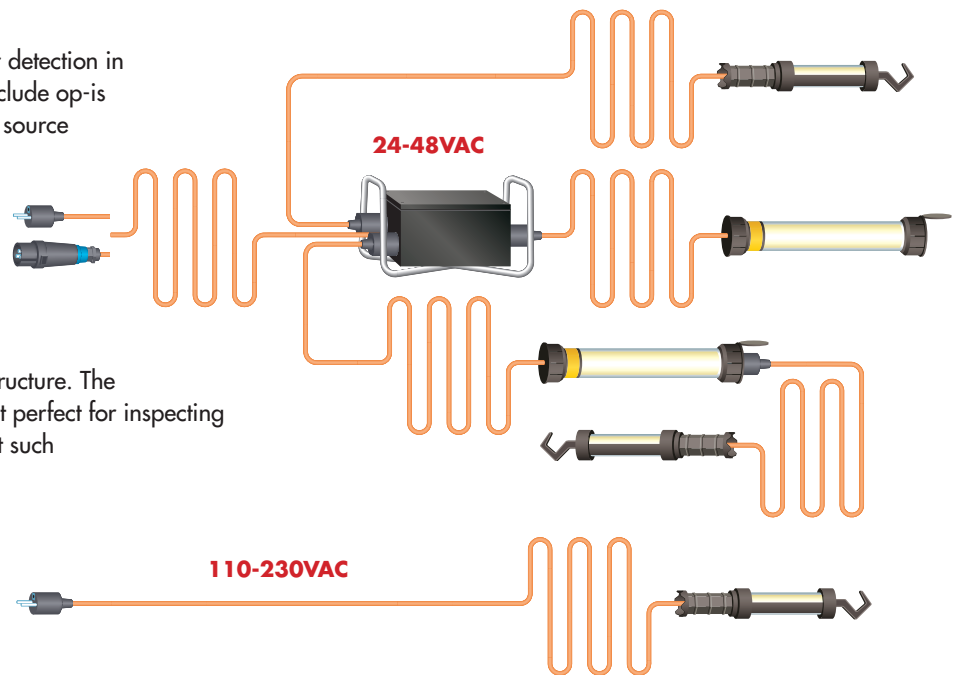

| TECHNICAL DATA | SEMIC SP |
|-----------------------|---|
| Code | - |
| Certification numbers | ATEX: EESF 20 ATEX 086X IECEX: EESF 21.0006X UKEX: CML 21UKEX51096X |
| Ingress protection | IP68 |
| Temperature rating | T4 (110-230V) T5 (24-42V) |
| Operating temperature | -20°C ... +40°C |
| Supply voltage | 24-48VAC and 110-230VAC |
| Power consumption | 9W |
| Dimensions | 367 mm x 64 mm Ø |
| Weight | 1,2 kg |

SLAM 62 PORTABLE EX-TRANSFORMERS


**SAFETY WITH
LOW-VOLTAGE.**



LINKING EXPLAINED

110/230V

110/230V

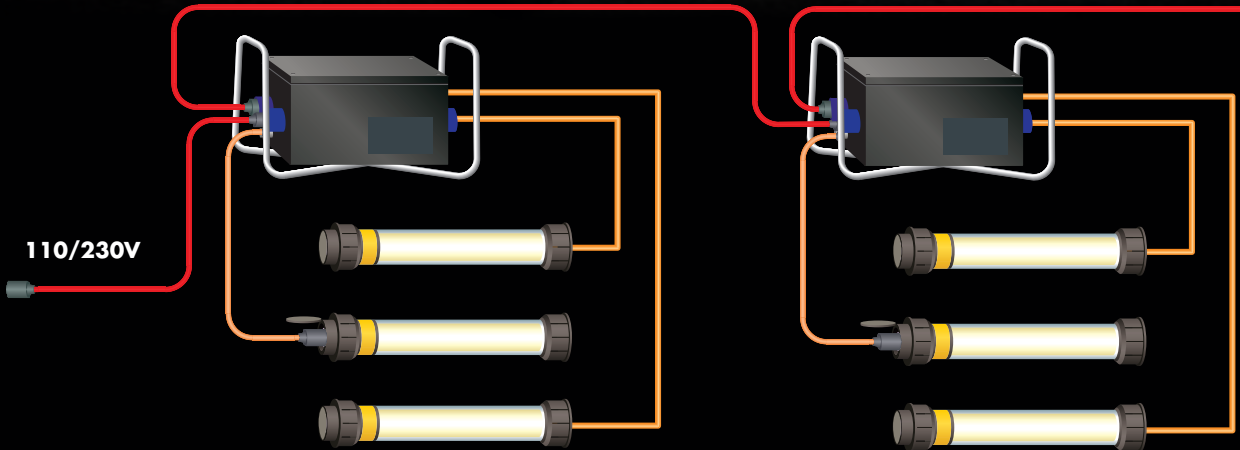

SLAM® TrafoEx Transformer

- ATEX, IECEX AND UKEX CERTIFIED FOR ZONES 1 & 21
- EASY TO CARRY AND STACK
- AVAILABLE WITH LINKING OPTION
- 2 AND 4 SOCKET OPTIONS
- FOR TEMPERATURES UP TO +50 °C
- FAST AND EASY SERVICING



Certified using the latest ATEX, IECEX and UKEX standards, the SLAM TrafoEx step-down transformer easy to use, is easy to maintain and easy to store. The sturdy frame keeps the transformer box well protected while providing lots of carrying options and secure stacking.

Socket configurations include support for linking transformers, allowing you to use several TrafoEx units in large lighting setups. This is ideal for servicing and maintenance projects where process downtime needs to be minimized.

The TrafoEx was designed with servicing in mind. The unit is extremely easy to work with. A fuse change takes barely one minute. The 2 and 4-socket arrangements include an option for linking transformers. You can set up large low-voltage lighting installations with multiple transformers, cutting process downtime for required maintenance.



| TECHNICAL DATA | TRAFEOX ATEX, UKEX | TRAFEOX IECEX |
|---------------------------------------|--|--|
| Code | STREX2CA, STREX4CA, STREX31CA | STREX2CA, STREX4CA |
| Certification (equipment certificate) | II 2G Ex eb IIC T4/T3 Gb II 2D Ex tb IIIC T70°C Db | Ex eb IIC T4/T3 Gb |
| Ingress protection | IP66 | IP66 |
| Operating temperature | -20...+55°C | -20...+55°C |
| Supply voltages | 110VAC, 230VAC | 110VAC, 230VAC |
| Output voltages | 12VAC, 24VAC, 42VAC | 12VAC, 24VAC, 42VAC |
| Output current | Max. 16A | Max. 16A |
| Power | 400VA | 400VA |
| Dimensions | 585 x 295 x 310 mm | 585 x 295 x 310mm |
| Weight | 19 kg including 4x sockets | 19 kg including 4x sockets |
| Surface materials | Aluminium case, stainless steel frame | Aluminium case, stainless steel frame |
| Plug and socket option | ATX, CEAG | CEAG |
| Variables | 2 or 4 secondary outputs. 3 secondary outputs + 1 mains output for linking. Cable length upon request. | 2 or 4 secondary outputs. Cable length upon request. |

SLAM

PORTABLE EX-SPLITTERS



**EXTREME
PORTABILITY
FOR EXTREME
CONDITIONS.**



SLAM® Splitter Ex

- 110 OR 230V MAINS VERSIONS • FOR ZONES 1 AND 2 • EXTREMELY ROBUST CONSTRUCTION • 2 OR 4 CEAG SOCKETS
- OPERATING TEMPERATURE -20°C...+40°C



The SLAM SPLITTER EX is ready to work for you, no matter how complex the lighting installation or how hazardous the area may be. The entire product is EX-certified with one certification,

greatly simplifying paperwork and proof of safety. The certification also confirms the exceptional portability of the SLAM SPLITTER EX – you can move the splitter even while connected.

SLAM® Splitter Ex High Temp

- 12, 24 & 24VAC SAFETY VOLTAGES AND 110 OR 230V MAINS VERSIONS • FOR ZONES 1 AND 2 • EXTREMELY ROBUST CONSTRUCTION • 2 OR 4 ATX SOCKETS
- SLAM HIGH TEMP SERIES. UP TO +55°C



With a wide range of supported voltages, the splitter can be used in any configuration, before or after transformers. The standard 10 meter input, also custom-orderable to any length, is


easily wrapped around the splitter for convenient transporting. With a confirmed operating temperature up to +55 °C, the high temperature version of SLAM SPLITTER EX can sweat it out easily.



| TECHNICAL DATA | SPLITTER EX | SPLITTER EX HIGH TEMP |
|---------------------------------------|---|--|
| Code | SS16EX4CCEA | SS16EX4C |
| Certification (equipment certificate) | Ex II 2 G Ex e d IIC T4 Gb Ex II 2 D Ex tb IIIC T80°C Db | Ex II 2 G Ex e d IIC T4 Gb Ex II 2 D Ex tb IIIC T80°C Db |
| Ingress protection | IP66 | IP66 |
| Operating temperature | -20 to +40 °C | -20 to +55 °C |
| Supply voltages | 110V or 230V | 12V, 24V, 42V, 110V or 230V |
| Supply current typical | Max. 16 A | Max. 16 A |
| Maximum load | 230V (3680W), 110V (1760W) | 230V (3680W), 110V (1760W), 42V (672W) 24V (384W), 12V (192W) |
| Dimensions | 532 x 356 x 313 mm | 532 x 356 x 313 mm |
| Weight | 10.5 kg (without cable/sockets/plug) | 10.5 kg (without cable/sockets/plug) |
| Surface materials | Dissipative elastomer and aluminium | Dissipative elastomer and aluminium |
| Variables: | CEAG Ex socket outlets. Supply cable type and length upon request. Plug upon request. | ATX Ex socket outlets. Supply cable type and length upon request. Plug upon request. |



EX CERTIFIED EXTENSION CABLES AND CABLE REELS

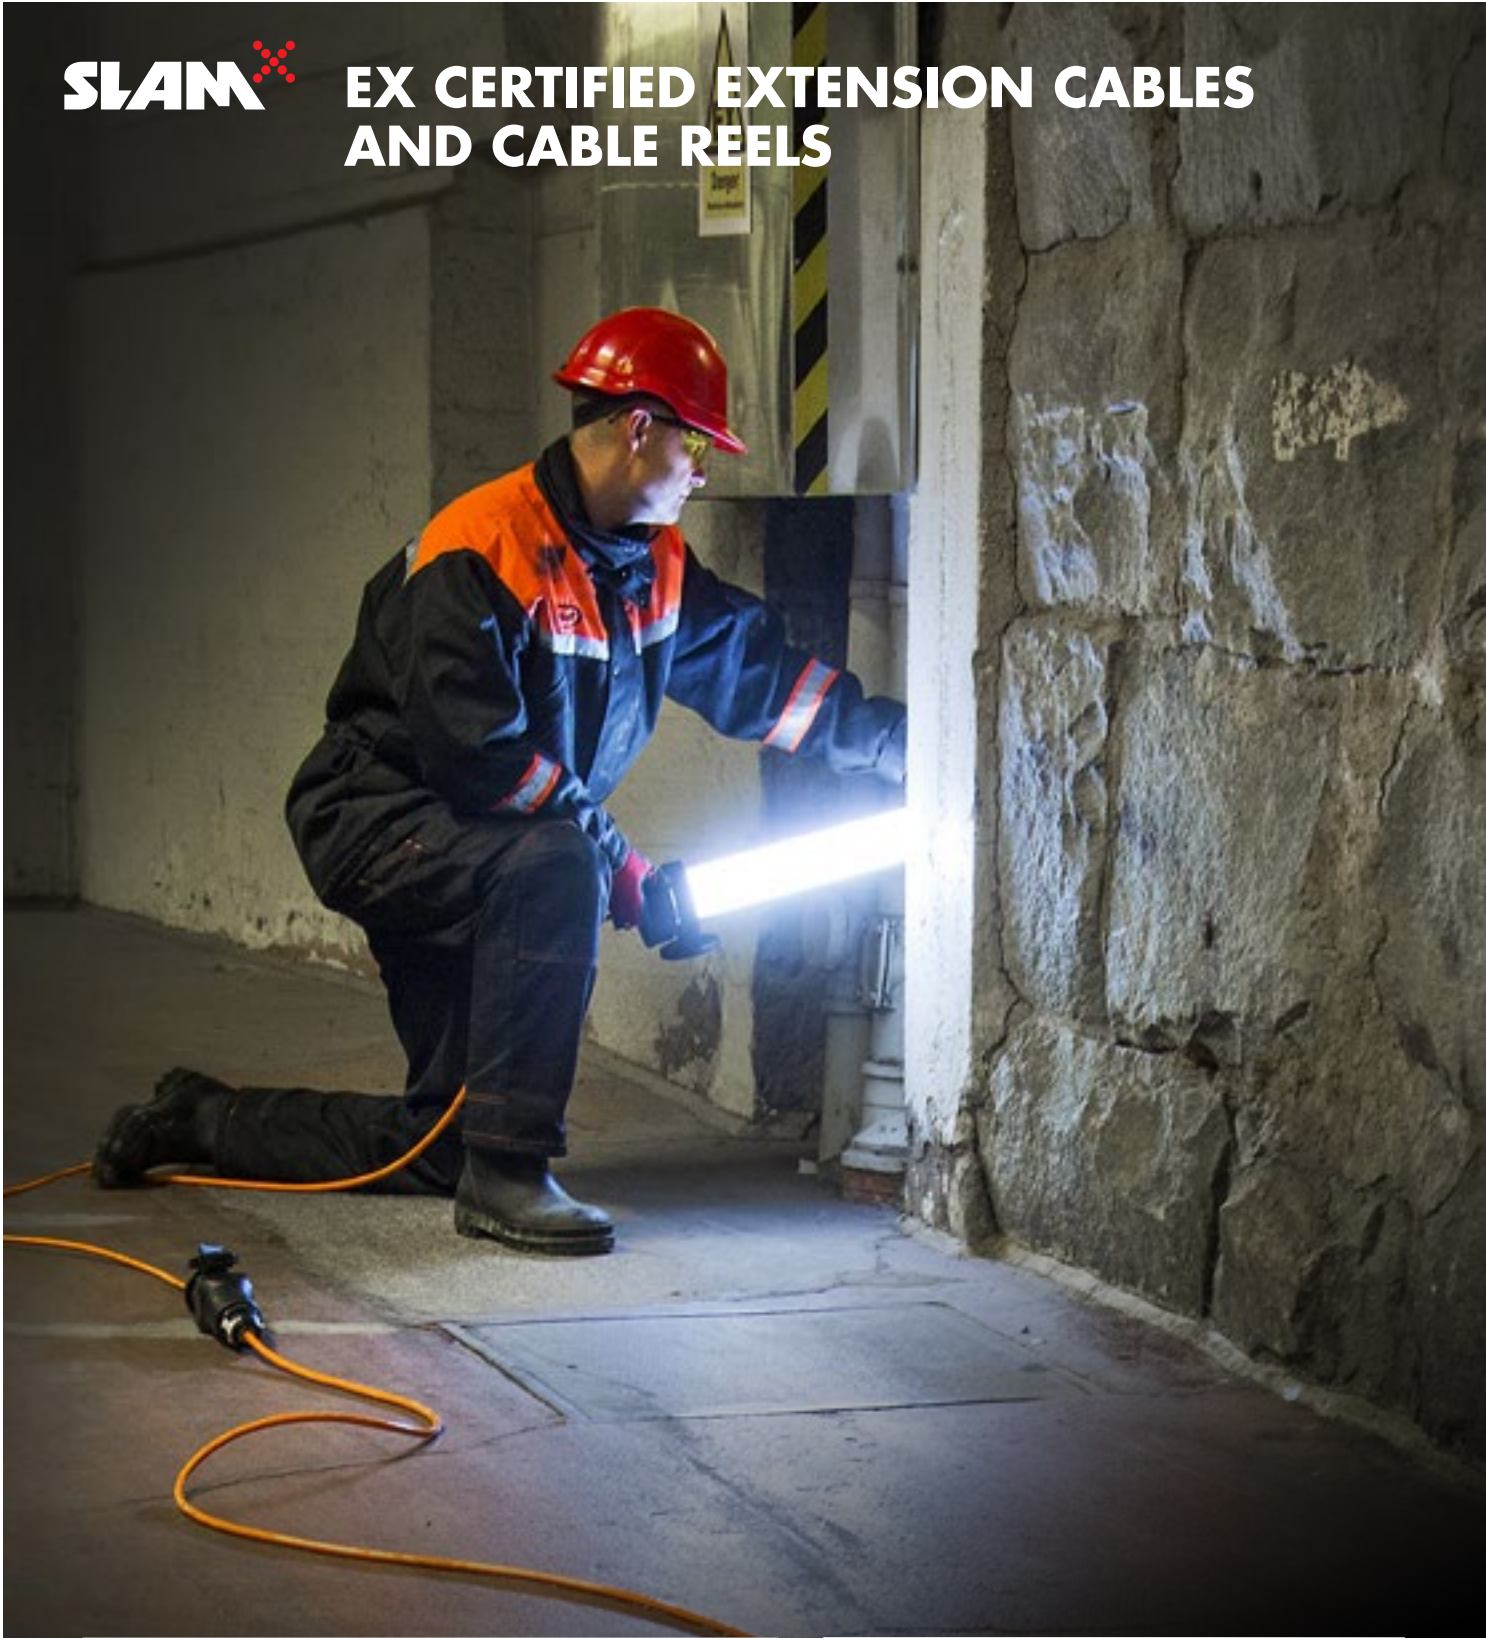

**STAY SAFE WITH
CERTIFIED CABLES
& REELS**



SLAM® Extension Cables and SLAM® Cable Reels

- ATEX CERTIFIED FOR ZONES 1 & 2 • COMPLETELY ATEX-CERTIFIED • IDEAL ELEMENTS FOR SETTING UP TEMPORARY SLAM-LIGHTING SYSTEMS • REEL EQUIPPED WITH PROPER ANTI-STATIC WHEELS • PART OF SYSTEM ATEX-CERTIFICATION OF SLAM TANK SETS



A comprehensive SLAM® solution is available when you need a movable electrical distribution system to EX-hazardous job sites. Thanks to SLAM® cables and cable reels, you can bring the electrical distribution close with one safe and fully certified package. Suitable for all supply voltages and all major EX-sockets available.

The SLAM® Cable Reel 16EX gives you a long distance power source in hazardous job sites with 1 or 2 sockets and maximum

150m output cable. It ensures electrical distribution in an easily portable and safe way.

The EX-certified SLAM® Extension Cable is ideal for complete temporary SLAM® lighting system. The extension cables may be a maximum of 25 m long and equipped with any conforming EX-certified plugs and mobile sockets (such as CEAG, ATX, Stahl or Marechal).



| TECHNICAL DATA | REEL 16EX | EXTENSION CABLES EX |
|-----------------------|--|---|
| Code | SR16EX | SEC16EX |
| Certification | II 2 G Ex e d IIC T4 Gb II 2 D Ex tb IIIC 120°C Db IP 66 | II 2 G Ex de IIC T4 Gb II 2 D Ex tb IIIC T120°C Db IP 66 |
| Ingress protection | IP66 | IP66 |
| Operating temperature | -20 to + 55 °C | -20 to + 55 °C |
| Supply voltage | 12VAC/VDC, 24VAC/VDC, 42VAC/VDC, 110VAC/VDC, 230VAC | 12VAC/VDC, 24VAC/VDC, 42VAC/VDC, 110VAC/VDC, 230VAC |
| Cable lengths | Small reel 15–50 m cable Big reel 50–80 m cable | 5–25 m cable |
| Dimensions | Small reel 460 x 550 x 275 mm Big reel 580 x 720 x 325 mm | – |
| Operating current | 16A (max) | 16A (max) |
| Variables | 1C: With one EX-socket 2C: With two EX-sockets | |

**TO MAKE YOUR LIGHTING
SOLUTION COMPLETE.**

SLAM

ACCESSORIES

SLAM® Click'n Fix Series EX-certified and anti-static



**EQUIPPED WITH
SECURING SCREWS**

EASY AND FAST FIXING SYSTEM • DIFFERENT OPTIONS FOR FASTENING • ALL CLICK'N FIX BRACKETS COME WITH SECURING SCREWS • NON-METALLIC CONSTRUCTION

SLAM Click 'n Fix is the easiest fixing system for portable lighting. No lighting system is complete without anti-static brackets to ensure every part of it is safe. You can find SLAM-

brackets that suit most surfaces, even or un-even. All the brackets are durable and easy to use. Every Click 'n Fix comes with a securing screw for improved safety.

SLAM® MAGNETIC BRACKET

Strong and fully anti-static magnetic fixing that does not require separate bonding wires! Also good for cable control, get rid of those cables lying on the floor. Certified for use in Ex areas.

SLAM® MAGNETIC BRACKET LOOSE

The loose magnet bracket allows the bracket to adjust to uneven surfaces, flexing in different horizontal or vertical directions. Certified for use in Ex areas.



BEFORE:
Extra bonding wire needed.



NOW:
No bonding needed.



SLAM[®] SINGLE BRACKET

Imagine a situation where you need to attach the work light onto a surface where no magnet or other part can attach. With SLAM Single Bracket you have an option of screwing the bracket firmly onto the surface and attach the work light there.



SLAM[®] SCAFFOLD BRACKET

This EX-certified anti-static bracket is specially designed to attach to scaffolding pipes, ideally suited for industrial settings such as painting work. The bracket includes a pipe contact part with sharp teeth and a tightening strap to ensure fast mounting.



SLAM[®] UNISTRUT BRACKET

In specific industries where Unistrut[®] -tracks are used, the SLAM Unistrut Bracket is the perfect solution. The bracket is equipped with Unistrut -part to enable proper fixing safely and without headache.




SLAM[®] PROTECTOR


Original SLAM[®] Protector is an effective cover for end caps and Ex-sockets. Keeping Ex-certified equipment like SLAM[®] portable lights clean is critical for your workers' safety and for the longevity of the lights. Ideal for paint jobs. Designed to fit all SLAM[®] Hornets and Tubes. 10 pcs in one set.



SLAM[®]
Protective
film

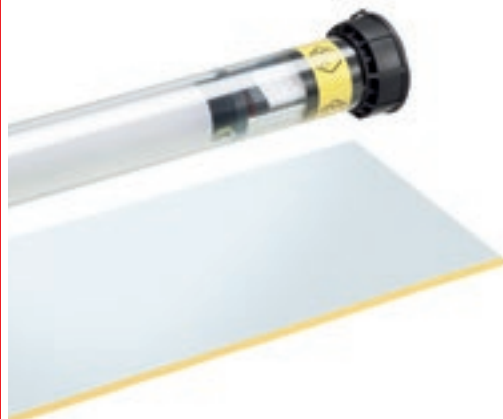

**UNPROTECTED
LIGHT RUINED
BY PAINT**

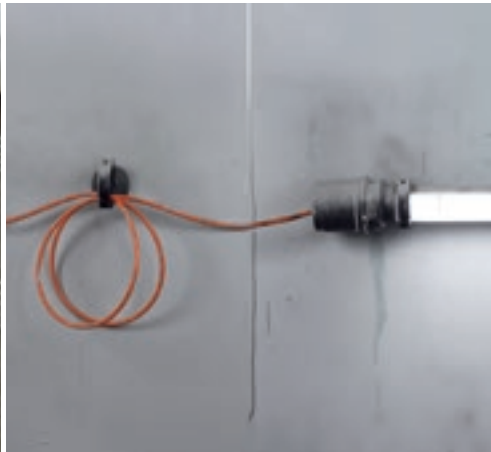

SLAM® S-HOOK KIT

The SLAM® S-Hook Kit includes one S-hook and one work light bracket. The quickest and easiest way to hang a work light is with the SLAM® S-Hook Kit. Ideal for hanging lights from pipes and scaffolding, you can also use the hooks to keep cables organized and off the floor.



SLAM® S-HOOK

Perfect addition for safe cable arrangements.



SLAM® HANGING STRAPS

You can count on adjustable hanging straps anywhere you go. They are flexible, literally do not contain any stressing weight and may be adjusted (tightened) in line with your work site requirements such as pipes, masts and supports of various sizes. They are also easier to demount compared to conventional cable ties.



All SLAM® work lights come with a protective film over the light housing. When the lights get dirty, the protective film can be removed and replaced with a new sheet. 10 pcs in one set. The SLAM® protective film is a small part that plays a big role in the servicing and operation of your lights.



MICA

PRODUCTS

MICA® IL-800

- ATEX & IECEX CERTIFIED • THREE HIGH-POWER LEDS
- TEMPERATURE CLASSIFICATION T4 • UP TO 200 LUMENS GUARANTEED OVER LED LIFETIME • OPTIONAL EMERGENCY FUNCTION (EM) AND BLINK MODE (BK)
- ROBUST IP67 HOUSING • SINGLE SWITCH CONTROL FOR TWO POWER MODES • ZONE 0 & ZONE 1 VERSIONS



The Atexor MICA® IL-800 Zone 0 and Zone 1 are all-purpose, high quality hand lamps specially designed for use in Explosion Hazardous Areas. A handy dual-mode switch lets you choose between extending operating time or boosting light output.

Featuring a robust, dissipative construction and a tempered 5 mm lens, this hand lamp will not let you down when it is most needed. As an added bonus, the MICA® IL-800 floats if dropped in water.

Advanced electronics prevent deep discharge of the battery, and when battery is getting low, the beam starts to blink at 15 second intervals.

While the Zone 1 can be used in the most common hazardous area scenarios for gas and dust, we constructed the Zone 0 for particularly dangerous gas conditions.

Both Zone 0 and Zone 1 models are available with the Atexor emergency lighting function (EM Function). When the hand lamp with EM-function is in the charger, it detects a power outage and turns on automatically.



| TECHNICAL DATA | IL-800 ZONE 0 AND ZONE 1 |
|---------------------------------|---|
| Certification | IL-800 ZONE 0: II 1 G Ex ia IIC T4 Ga II 2 D Ex tb IIIC T100°C IP67 Db IL-800 ZONE 1: II 2G Ex ib IIC T4 Ga II 2D Ex tb IIIC 100°C IP67 Db |
| Area of classification: Gas | IL-800 ZONE 0: 0, 1 and 2 IL-800 ZONE 1: 1 and 2 |
| Area of classification: Dust | IL-800 ZONE 0 and IL-800 ZONE 1: Zones 21 and 22 |
| IP rating | IP67 |
| Light source | 3x Ultra-bright LEDs |
| Battery | 6V NiMH |
| Operating time | Full power 6 hrs, Low power 12 hrs |
| Operating temperature | -20 to +40 °C |
| Weight | 1.1 kg |

MICA



**BRIGHT TOOLS FOR
PROFESSIONALS.**

MICA® ML-808

- HIGH-POWER CREE LED • TWO-MODE BEAM, 25 AND 100 LUMENS • OPERATING TIME UP TO 15 HOURS • RECHARGE IN LESS THAN 3 HOURS
- LED-BAR INDICATOR FOR BATTERY CAPACITY
- OPTIONAL EMERGENCY FUNCTION (EM) •
- OPTIONAL BLINKING FUNCTION (BK)



The MICA® ML-808 is the latest in high-powered ATEX hand lamps. It is a step up from the well-known MICA® ML-800. The new ML-808 is stored and recharged in the same MICA® MLC charging dock as previous MICA® ML-series lights. Two power modes allows the user to obtain the best combination of light power and usage time.

The lamp is equipped with an environmentally friendly NiMH battery offering continuous operating time up to 15 hours. Advanced electronics in the ML-808 protect the battery from deep discharges and warn the user of low battery charge by flashing the light beam when there is only 20 minutes of operating time left. The shock resistant IP-65 casing is manufactured entirely of anti-static plastic and aluminium. The lens is three millimetres thick and specially toughened. MICA® ML-808 is supplied with a strong belt clip and wrist strap.

| TECHNICAL DATA | ML-808 |
|---------------------------------|---|
| Certification | II 2 G Ex ib op is IIC T4 Gb II 2 D Ex ib op is IIIC T135°C Db |
| Area of classification: Gas | Zones 1 and 2 |
| Area or classification: Dust | Zones 21 and 22 |
| IP rating | IP65 |
| Light source | Ultra-bright LED |
| Battery | 6V NiMH |
| Operating time | Full power 4 hrs 30 min Low power 15 hrs |
| Operating temperature | -20 to +40 °C |
| Dimensions/Weight | 120 x 64 x 55mm/400g |



Intelligent chargers for MICA® lamps

Rugged aluminium construction

LED light indicates charging state

Input: 85...265VAC

LED light indicates charging state

Input: 12...24VDC

MICA ILC4-VAC (FOR IL-SERIES) MICA ILC4

LED indicators for charging state

Fast charge in less than 3 hours

Input voltage 90...265VAC

Supports ILC4 and MLC

EUR, US, SAA & UK plugs available

MICA MLC (FOR ML-SERIES) MICA IL-2



**RELIABLE FIXED
LIGHTING WHERE
SAFETY MATTERS
THE MOST.**

SLAM FIXED **PRODUCTS**

ATEXOR'S FIXED LUMINAIRES FOR ATEX AND IECEX ZONES PROVIDE POWERFUL YET SAFE, ENERGY EFFICIENT LED LIGHT THAT IS EASY ON WORKERS' EYES. THE SLAM FIXED® RANGE OFFERS HIGH-QUALITY FEATURES AND ROBUSTNESS FOR ALL TYPES OF ENVIRONMENTS AND APPLICATIONS.

SLAM FIXED[®] Nordic 1LED / 2LED WS

- ATEX CERTIFIED FOR ZONES 1 AND 21
- TEMPERATURE CLASS T4 • SAFEYE[®] TECHNOLOGY • HIGH QUALITY LEDS AND COMPONENTS • VERSATILE MOUNTING OPTIONS • SPECIALLY DESIGNED FOR COLD CLIMATES

SAFE LIGHT!
OP IS IN
CONTROL



Popular amongst refineries in cold climates, SLAM FIXED[®] Nordic 1LED and 2LED luminaires deliver on all the expectations of modern LED lighting: energy efficient, long lasting, durable and easy to maintain. With a Color Rendering Index (CRI) above 80, you also get great color distinction.

Nordic luminaires are made from durable polymers for excellent corrosion and weather resistance. To ensure maximum ruggedness, our shock-testing protocol far exceeds normal standards.

The Nordic 2LED features two independent LED units in a single enclosure. Each unit is controlled by separate, isolated electronics for improved reliability.

All SLAM FIXED[®] lights are available with pre-installed brackets and cables for speed and flexibility. If these options are not suitable or you need custom fixings, please contact our team for alternatives!

SLAM FIXED[®] Novo 1LED / 2LED

- ATEX AND IECEx CERTIFIED FOR ZONES 1 AND 21 • T4 RATING WITH OPERATING TEMP. UP TO +55 °C
- SAFEYE[®] TECHNOLOGY • HIGH QUALITY LEDS AND COMPONENTS
- VERSATILE MOUNTING OPTIONS

SAFE LIGHT!
OP IS IN
CONTROL



Building on the strong foundation of our SLAM FIXED[®] Nordic luminaires, the Novo 1LED and 2LED bring a new dimension of ruggedness with the ability to withstand ambient temperatures as high as +55 °C. In addition, they are certified for both IECEx and ATEX Zones 1 and 21.

The robust polycarbonate frame and high-quality components help give the Novo luminaires extremely long life, no matter how harsh the conditions are. The entire construction is also completely dissipative. There is no risk of static charge build-up, so you can safely clean the installed luminaires.

Despite the rugged build, they are surprisingly lightweight, which helps ease installation and reduces stress on brackets and frames over the years. The luminaires are fully repairable, and all the components are replaceable.

At Atexor, we specialize in creating customized lighting solutions that best fit our customers' needs, including additional testing and Ex certifications. Contact us to set up a project to create the best products and solutions for you.

**INDUSTRY FIRST FIXED
AND SEMI-PORTABLE
HYBRID EX LIGHT**

**SEMIC SF
WITH FIXED
CEILING
MOUNT**

**SEMIC SF WITH
SEMI-PORTABLE
WALL MOUNT**

ZONES

1

21



SLAM FIXED® SEMIC SF

- ATEX, IECEX AND UKEX CERTIFIED FOR ZONES 1 & 2
- TESTED FOR OPTICAL RADIATION (OP IS)
- UP TO T5
- IP68
- CRI 85
- ATEXOR SAFEYE®
- 650 TESTED LUMENS
- COMPACT SIZE
- EASY TO INSTALL
- 2 BRACKETS INCLUDED



The Atexor SEMIC SF has exceptional safety ratings plus op-is approval. Despite producing 650 lumens, there is no risk of the light being a source of ignition. We also fitted the SF with our SafeEye® technology to protect workers' eyes and keep the light gentle and smooth. SEMIC's high quality LEDs produce a pure light allowing workers to confidently distinguish colors in the work area.

Each unit comes with a pair of specially designed brackets for wall or ceiling installations. Use two brackets for a robust fixed bulkhead installation without the bulk. This makes the SEMIC SF an ideal fixed lighting option for tight or cramped spaces, such as narrow corridors on vessels, tunnels, columns, and so forth.


For hybrid, "semi-portable" applications, one bracket is ideal. The bracket is made from dissipative material, so you can safely and easily detach the light for a closer look at components. Naturally the SEMIC family is fully certified as a portable EX light.

The Atexor SEMIC SF is built to last. High quality components and a solid, compact design reduce the space needed for light fixtures and ensure longevity.

Pre-fitted cables cut to custom lengths ensure the SEMIC SF is just write for your needs. Its compact construction takes up very little space, and even in fixed installations, you can rotate the unit in the brackets to adjust the light direction as needed.



| TECHNICAL DATA | SEMIC SF |
|-----------------------|---|
| Code | - |
| Certification | ATEX: EESF 20 ATEX 086X IECEX: EESF 21.0006X UKEX: CML 21UKEX51096X |
| Ingress protection | IP68 |
| Temperature rating | T4 (110-230V) T5 (24-42V) |
| Operating temperature | -20°C ... +40°C |
| Supply voltage | 24-48VAC and 110-230VAC |
| Power consumption | 9W |
| Dimensions | 192 mm x 50 mm Ø |
| Weight | 1 kg |

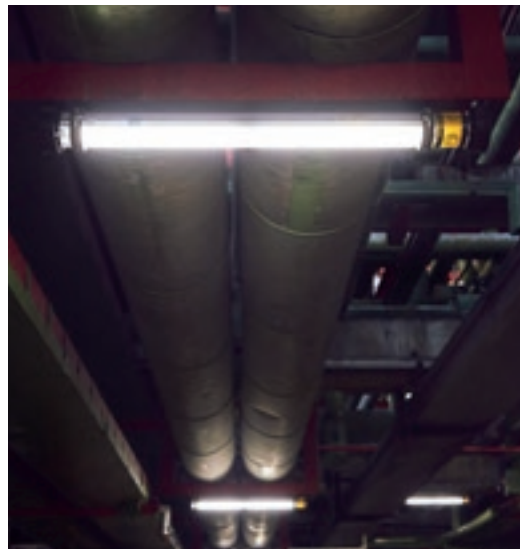

SLAM FIXED® 1 & 2 LED Ceiling & Wall Installation Kit

- STAINLESS STEEL A4 (AISI316)
- FRAME ROTATES 360°
- LIGHT ROTATES 360°
- SLOTTED SCREW HOLES
- EXTREMELY RUGGED CONSTRUCTION




With slotted bolt holes and 360° rotating braces, this installation kit is extremely versatile, saving time and eliminating hassles. The rotating braces allow you to position the base bracket exactly as needed. The round luminaire can be easily placed

into the brace and rotated to adjust the lighting for the target area. The base brackets are made of thick A4 stainless steel to suit the most demanding conditions and withstand rough treatment.

SLAM FIXED® 1 & 2 LED Pole Installation Kit

- STAINLESS STEEL A4 (AISI316)
- SAME BRACKET SET FITS 1LED & 2LED
- UNIQUE DESIGN SUPPORTS 30-45MM DIAMETER POLES
- LIGHT ROTATES 360°
- EXTREMELY RUGGED CONSTRUCTION

Pole diameter: 30-45mm

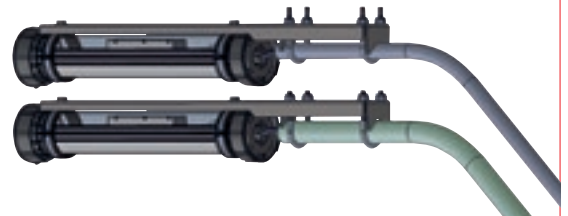

With easily adjustable brackets, you can skip making exact measure mentions of pols. The brackets accommodate pole diameters ranging from 30 to 45 mm. Made of thick A4 stainless steel, these brackets suit even the most demanding conditions and withstand rough treatment.

Since the SLAM FIXED luminaires come with pre-installed fittings and cable, the actual installation time is cut to an absolute

minimum. No need to cut and strip cables at the site. The luminaires are held by brace that allow for easy adjustment of the light beam direction.

If our installation kits do not perfectly meet your needs, please do not hesitate to contact our design team!



Atexor Oy has decades of experience in explosion hazardous area lighting and power supply solutions. In cooperation with the customer, we find the most economical solution, without compromising any safety elements. We are known for our ability to solve customers' hazardous area challenges in demanding time schedules.

Atexor is part of Teknopower Group. In addition to our own subsidiaries in the UK & Russia, the group has operations in Sweden, Russia, UK, USA, Poland, UAE, Germany, India, and in Malaysia.

• Atexor Oy • P.O.BOX 63 • FIN-02631 ESPOO, FINLAND
• Tel. +358 20 734 3250 • Fax. +358 20 734 3298

www.atexor.com