



ULTITEC 1000L Dust & Light Liquid Spray Protective Coverall

Best economic choice type 5 & 6 protective clothing, provides superior protection against hazardous dry particulates and light liquid spray in the workplaces.



TYPE 5



TYPE 6



EN 1073-2



EN 1149-5

Breathability



Liquid Protection



Dry Particulate Protection



FEATURES

- **Lightweight & more durable**
Our multi-layer SMS fabric provides superior physical performance while it is breathable for wearer's comfort.
- **Excellent particle barrier**
The fabric filters resist 99.8% of particles of size 0.5-1µm.
- **Designed to fit your body shape**
Fully elasticated hood, ankles, wrists, and waist afford optimum comfort and ease of movement.
- **Antistatic (EN 1149-5) is optional!**
If antistatic is not required, then ULTITEC 1000L-NA can be an option. It provides a more cost-effective solution and is especially suitable for asbestos removal. Different colors are also available in blue, red and yellow.

SAURYA

Value Driven Safety

APPLICATION

Asbestos Removal
Construction
Grinding
Hazardous Dust
Metal Polishing
Mining Process
Powder Coating
Waste Cleaning

Zipper fastens to underside of chin



3-piece hood



Elasticated wrists



Fully elasticated waist



Ample crotch



Elasticated ankles



Color

ULTITEC 1000L-NA

PERFORMANCE CHART


FABRIC PHYSICAL PROPERTIES	TEST METHOD	CLASS
Abrasion Resistance	EN 530	2
Flex Cracking Resistance	ISO 7854	5
Trapezoidal Tear Resist.	ISO 9073-4	1
Tensile Strength	ISO 13934-1	1
Puncture Resistance	EN 863	1
Seam Strength	ISO 13935-2	3
Antistaticity	EN 1149-5	Pass
pH Value	ISO 3071	Pass
AZO Dyes	EN 14362-1	Pass
Fastness to perspiration	ISO 105-E04	Pass
Resistance to Ignition	EN 13274-4	Pass

FABRIC CHEMICAL PROPERTIES	TEST METHOD	PENETRATION	REPELLENCY
Sulphuric acid 30%	ISO 6530	Class 3	Class 3
Sodium Hydroxide 10%	ISO 6530	Class 3	Class 3

WHOLE SUIT TEST PERFORMANCE	RESULT
Type 5 Inward Leakage Test	Pass
Type 6 Low Level Spray Test	Pass
EN 1073-2 Protective Clothing Against Radioactive Contamination	Class 1

Fabric Construction

Multilayer SMS fabric

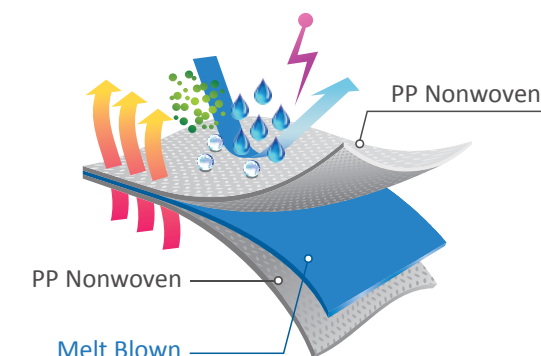

Seam Construction

4-thread overlocked seam

- 7-9 stitched per inch
- Heavier thread fibre is above 150D
- Bite depth 4 mm

