CorrosionMaster Single FNF 3.6

Technical Data Sheet

| ranach Manufacturing Pty Ltd 61 3 9761 6633 |
|--|
| 61 3 9761 6633 |
| |
| at Driscoll usiness Development Manager |
| /11/2015 |
| 1 |

PROPERTIES


| Standards | AS/NZS 1892.3 |
|--------------------------------|---------------------------------------|
| Load Rating | 150kg |
| Flectrical Properties | Complies to AS/NZS 1892.3 Section 2.4 |
| leat Resistance | 130 Degrees Celsius |
| Chemical Resistance | Tested to AS/NZS 1892.3 |
| Accelerated Weathering Test | Tested to AS 2331.3.1 |
| 🖗 Warranty | 3 years from date of manufacturing |

MEASUREMENTS

| meAsortemento | | |
|---------------|------------------------|----------------------------|
| kg | Weight | Fly: 9.6kg / Base: 9.9kg |
| ₹ | Distance Between Rungs | 0.305m |
| ٥ | Height | Fly: 3.685m / Base: 3.640m |
| × | Height to Top Rung | 3.250m |
| \diamond | Width | Fly: 0.365m / Base: 0.450m |
| | | |

COMPONENTS

| A Stiles | Fibreglass: ISO-PE resin with e-glass fibres |
|-------------------|---|
| B Rungs | Round: Fibreglass ISO-PE resin with e-glass fibres |
| C Feet | Thermoplastic Vulcanizate |
| P Rung Wear Strip | HD Polyethylene |
| End Caps | 35% GF Nylon PV 35H – Black |
| Rivets | Zinc Plated Low Carbon Steel |

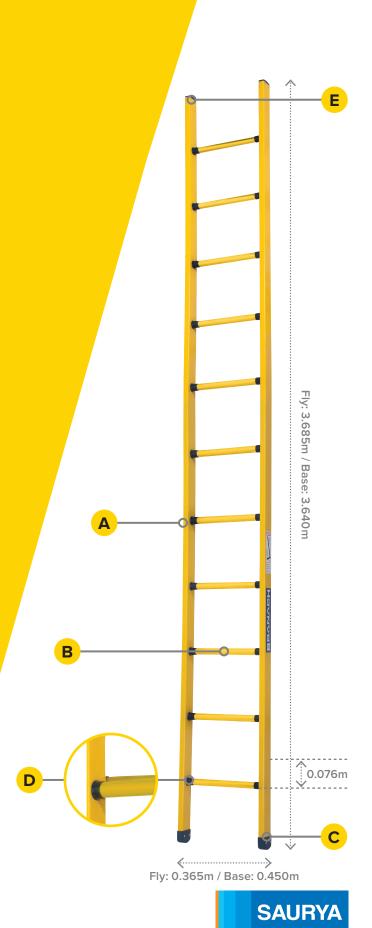

Value Driven Safety