


Manufacturing date	5.10.2009 -
ATEX & IECEx marking	Ex II 2 G Ex e d IIC T4 Gb Ex II 2 D Ex tb IIIC T120°C Db
Product description	Explosion protected portable cable reel
Temperature classification	T4 (internal) T120 °C (external)
Operating temperature	-20°C ... +55°C
Supply Voltage (min-max)	12 V, 24V, 42V, 110V, 230V +/- 6%
Supply Current typical	Max. 16A
Electrical class	Class I
Maximum load	230V 3680W 110V 1760W 42V 672W 24V 384W 12V 192W
Cable	Orange H07BQ-F or Yellow PUR&CY Small reel 15-50m Big reel 50-80m
Plug and socket options	ATX, CEAG, Stahl, Marechal
Enclosure	Steel, aluminium, black and orange painted
Ingress protection	IP66
Weight	Small reel: 26,5 kg, with 50m PUR&CY 3x1,5mm ² Big reel: 44,5 kg, with 80m PUR&CY 3x1,5mm ²
Warranty	You will find detailed warranty conditions from www.atexor.com/downloads/warranty

Product model	Dimensions / mm					
	A	B	C	F	H	T
Small Reel	460	320	170	350	550	275
Big Reel	580	320	170	430	720	325

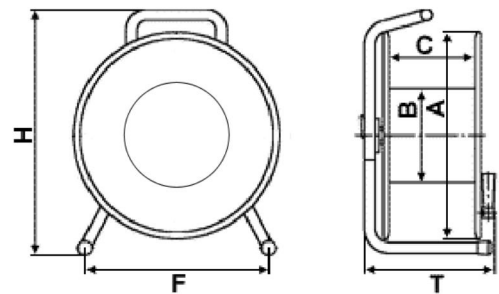

SAURYA

Value Driven Safety