







CorrosionMaster Extension FEF 4.0






Technical Data Sheet

Product Code	FEF 4.0
Manufacturer's Name	Branach Manufacturing Pty Ltd
Phone Number	+61 3 9761 6633
Certified By (Name, Title)	Pat Driscoll Business Development Manager
Last Updated	5/11/2015

PROPERTIES


<input checked="" type="checkbox"/> Standards	AS/NZS 1892.3
 Load Rating	150kg
 Electrical Properties	Complies to AS/NZS 1892.3 Section 2.4
 Heat Resistance	130 Degrees Celsius
 Chemical Resistance	Tested to AS/NZS 1892.3
 Accelerated Weathering Test	Tested to AS 2331.3.1
 Warranty	3 years from date of manufacturing

MEASUREMENTS

 Weight	15.2 kg
 Distance Between Rungs	0.305m
 Closed Height	2.70m
 Extended Height	4.00m
 Width	Fly: 0.370m / Base: 0.450m

COMPONENTS

A Stiles	Fibreglass: ISO-PE resin with e-glass fibres
B Rungs	Round: Fibreglass ISO-PE resin with e-glass fibres
C Feet	Swivel: 35% GF Nylon
D Rung Wear Strip	HD Polyethylene
E End Caps	35% GF Nylon
F Rope	Polypropylene 10mm
G Latch	Branach Latch: 316 Stainless steel, coated with PPA
H Ladder Guide Bracket	316 Stainless steel coated with PPA
Rivets	316 Stainless Steel

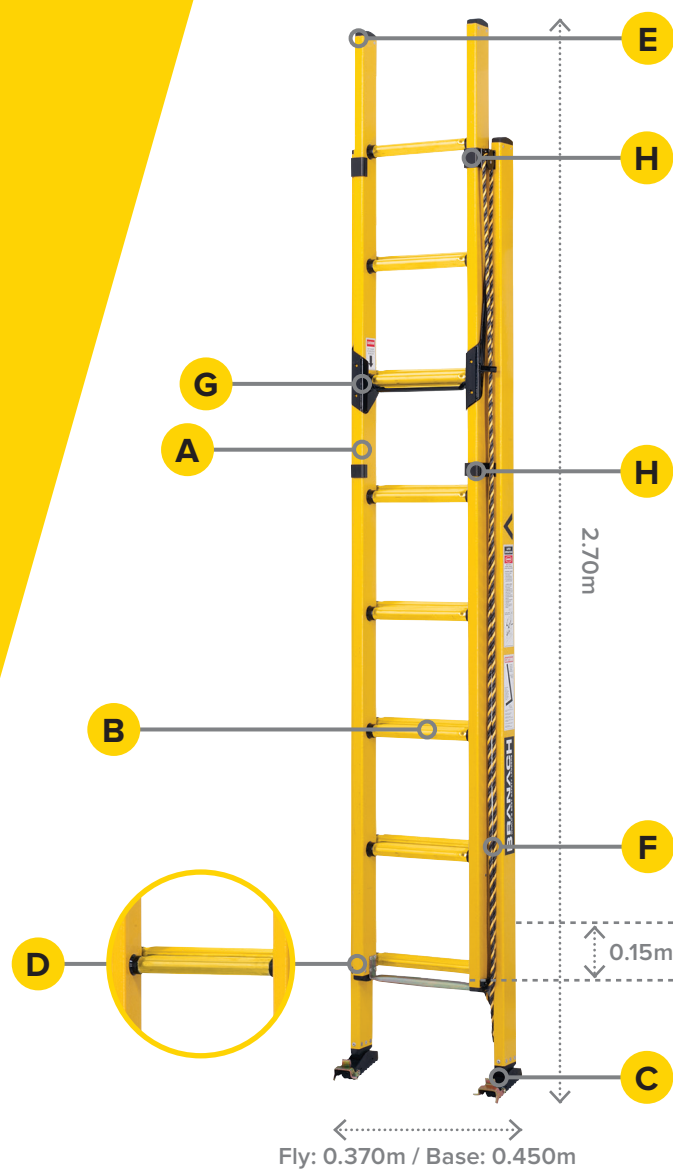

SAURYA

Value Driven Safety